


# 晟睿實業有限公司

## 四叉割溝拉帽 - 膨脹型 ( 剖溝拉帽,開叉型拉帽)

四叉割溝拉帽-膨脹型之特性：

- 1.高拉力、高扭力
  - 2.板厚範圍大
  - 3.表面不平整也可牢牢扣緊物件
  - 4.安裝方便且不會使軟塑料或薄金屬薄板扭曲、變形或受損
  - 5.拉鉚後，四叉割溝拉帽會摺疊變形，形成四個腳，緊抓住安裝物件之表面的下方，形成一個永久可用且堅固的內牙，且夾緊的面積大，形成絕佳的拉力強度，不易脫落
- 專門設計用於：安裝柔軟及脆性材料、金屬薄板、塑膠材料及複合材料等

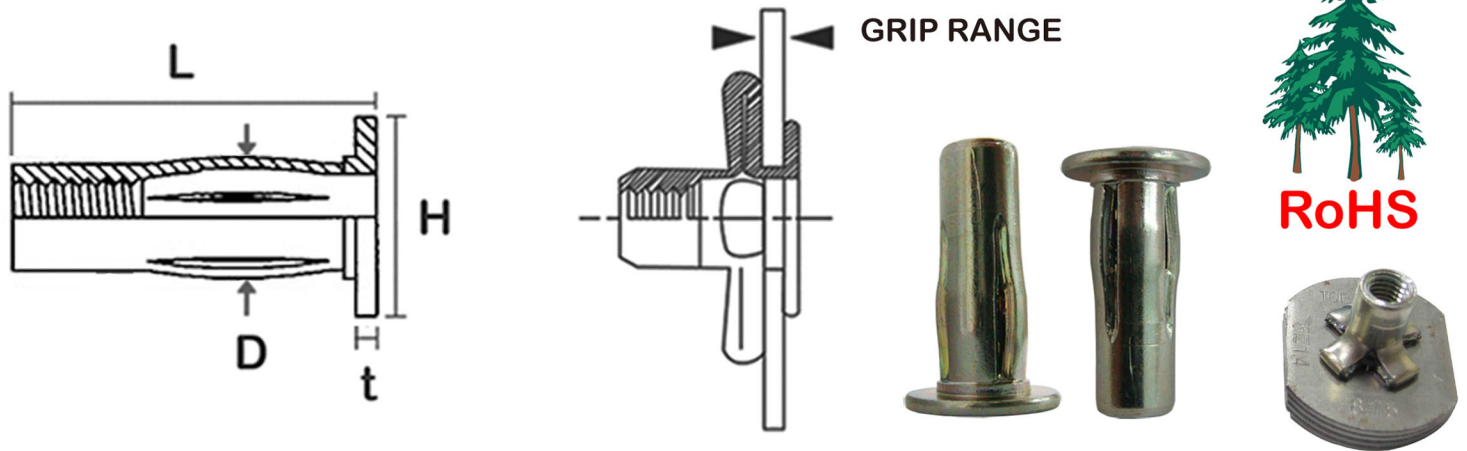

PART NO.	THREAD SIZE	GRIP RANGE	HOLE SIZE	HEAD DIA. (H)	HEAD THICKNESS (t)	BODY DIA. (D)	LENGTH (L)
TOPSN6	M6PH1.0	0.50-7.10	9.80-9.93	15.90	1.50	9.76	26.20
TOPSN6-L	M6PH1.0	7.10-12.70	9.80-9.93	15.90	1.50	9.76	32.00
TOPSN8	M8PH1.25	0.50-7.10	12.6 -12.8	19.00	1.57	12.75	30.00
TOPSN8-L	M8PH1.25	7.10-12.70	12.6 -12.8	19.00	1.57	12.75	35.80
TOPSN10	M10PH1.50	0.50-7.10	14.27-14.45	22.20	2.24	14.23	32.30
TOPSN10-L	M10PH1.50	7.10-12.70	14.27-14.45	22.20	2.24	14.23	37.80

材質/電鍍  
鐵/鍍黃鋅  
鐵/鍍鋅  
鐵/鍍鎳

<https://ironman53153551.weebly.com/>

電話: 886-4-7283965

傳真: 886-4-7283897

E-mail: ironman53153551@gmail.com

地址:彰化縣彰化市古夷里泰和路二段415巷78號




# TOP SCREW METAL CORP.

## PLUSNUTS - PRE-BULBED

Plusnut is designed to provide the ultimate pull-out strength in the thin sheet metal and plastics. The four legs are pulled together expanding outwards behind the surface material to provide a large load bearing area.

**NEW**

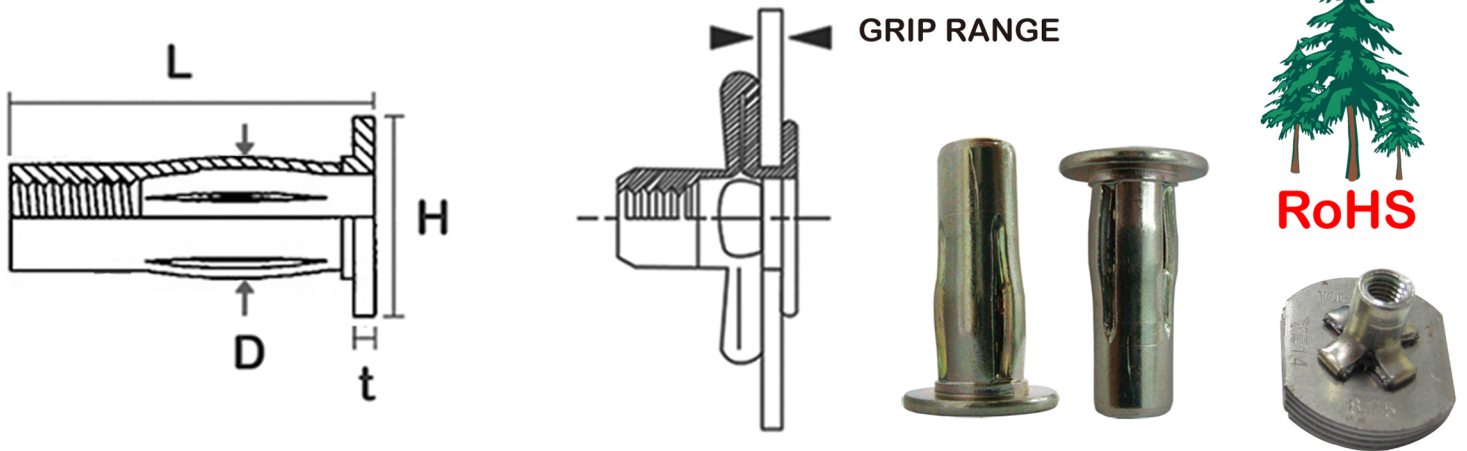

PART NO.	THREAD SIZE	GRIP RANGE	HOLE SIZE	HEAD DIA. (H)	HEAD THICKNESS (t)	BODY DIA. (D)	LENGTH (L)
TOPSN6	M6PH1.0	0.50-7.10	9.80-9.93	15.90	1.50	9.76	26.20
TOPSN6-L	M6PH1.0	7.10-12.70	9.80-9.93	15.90	1.50	9.76	32.00
TOPSN8	M8PH1.25	0.50-7.10	12.6 -12.8	19.00	1.57	12.75	30.00
TOPSN8-L	M8PH1.25	7.10-12.70	12.6 -12.8	19.00	1.57	12.75	35.80
TOPSN10	M10PH1.50	0.50-7.10	14.27-14.45	22.20	2.24	14.23	32.30
TOPSN10-L	M10PH1.50	7.10-12.70	14.27-14.45	22.20	2.24	14.23	37.80

**Material/Finished**  
 Steel/ Zinc Yellow RoHS  
 Steel/ Zinc Clear RoHS  
 Steel/ Zinc Nickel

TOP SCREW METAL CORP.  
 TEL: +886-4-7237159  
 FAX: +886-4-7246640  
 ✉ : receipt@topscREW.com.tw  
 www.topscREW.com.tw